



شركة الصقور للمعدات الصناعية
Assugor Industrial Equipment Co

PRODUCTS BOOK





خبرة تمتد
لأكثر من
خمسة عقود



شركة المقور للمعدات الصناعية
Assugor Industrial Equipment Co

شركة الصقور للمعدات الصناعية
Assugor Industrial Equipment Co

تمثل شركة الصقور للمعدات الصناعية اسماً راسخاً في سوق المعدات الصناعية الخفيفة في المملكة العربية السعودية.

شراكات عالمية. اعتماد محلي



نعمل في شركة الصقور للمعدات الصناعية على توفير حلول موثوقة مبنية على خبرة طويلة، وشراكات عالمية، ومعايير جودة عالية، بما يضمن لعملائنا أداءً مستقرًا يدعم استمرارية الأعمال ويعزز كفاءة التشغيل في مختلف بيئات العمل.

ونفخر بكوننا وكلاء معتمدين وحصريين لعلامات تجارية صناعية عالمية، تم اختيارها لما تتمتع به من سمعة قوية، جودة عالية، واعتمادية طويلة الأمد

CONTENTS

KYOCERA Power Tools	05
DWT Power Tools	23
HALE Power Tools – Pallet Trucks Air Compressor – Foam Tank	35
SENCI Generators	41
ASADA Threading Machines	51
MULTIPLE BRANDS Air Compressor & Accessories	57
ACCESSORIES	63
SPARE PARTS	70



 **KYOCERA**



علامة KYOCERA اليابانية تُعد من الأسماء الرائدة في مجال المعدات الصناعية، حيث تتميز بالدقة العالية والمتانة، وتقدم حلولاً مصممة لأداء ثابت واعتمادية طويلة الأمد في مختلف بيئات العمل. تعتمد منتجاتها على تقنيات تصنيع متقدمة تضمن كفاءة تشغيلية متوازنة مع عمر استخدام طويل وجودة تنفيذ عالية، ما يجعلها خياراً موثقاً في الأعمال المهنية والصناعية. تشمل حلول KYOCERA مجموعة من العدد الصناعية والكهربائية، وأدوات القطع والمعالجة، ومعدات التشغيل الدقيقة، إضافة إلى ملحقات داعمة للاستخدام المهني. وتوفر شركة الطقور للمعدات الصناعية منتجات KYOCERA ضمن معايير اختيار واضحة، تركز على الجودة والاعتمادية وملاءمة الاستخدام في السوق المحلي وقطاعات المقاولات والتشييد، بما يدعم استمرارية الأداء ويعزز كفاءة الأعمال.

BDX-2 Cordless Driver Drill مفك بطارية صغير

KYOCERA

01

Voltage:	3.6 V
Shank Type:	6.35 mm (Hex Bit)
Max. Torque:	3.5 N-M
Screwing Capacity:	5 mm
Rotation Speed:	180 min ⁻¹
Charging Time:	5 Hours
Battery Type:	Li-ion (1500 mAh)
Overall Dimensions:	150 × 47 × 125 mm
Weight:	0.3 Kg



G-600 Die Grinder 1/4" طاروخ بلف

KYOCERA

02

Input Power:	500 Watts
Collet Diameter:	6 mm
Max. Disc Diameter:	25 mm
Rotation Speed:	28,000 min ⁻¹
Net Weight:	1.6 Kg



G-1008 Angle Grinder 4"

طاروخ زاوية

Input Power:	1010 W
Wheel Size:	100 mm
Rotation Speed:	11,000 min ⁻¹
Switch Type:	Slide
Housing Diameter:	62 mm
Overall Dimensions:	291 × 117 × 105 mm
Weight:	1.6 Kg

 KYOCERA

03



G-1159 Angle Grinder 4 ½"

طاروخ زاوية

Input Power:	1010 W
Wheel Size:	115 mm
Rotation Speed:	11,000 min ⁻¹
Switch Type:	Slide
Housing Diameter:	62 mm
Overall Dimensions:	268 × 129 × 99 mm
Weight:	1.8 Kg

 KYOCERA

04



G-235 Large Angle Grinder 9"

طاروخ زاوية

Input Power:	2500 W
Wheel Size:	230 mm
Rotation Speed:	6,600 min ⁻¹
Switch Type:	Trigger
Overall Dimensions:	481 × 106 × 132 mm
Weight:	4.6 Kg

 KYOCERA

05



S-350 Orbital Sander

حفافة

Input Power:	190 W
Pad Size:	93 × 185 mm
Paper Size:	93 × 230 mm
Vibration:	11,000 min ⁻¹
Orbit Diameter:	2.0 mm
Overall Dimensions:	243 × 93 × 154 mm
Weight:	1.3 Kg

 KYOCERA

06



RSE-1250 Random Orbit Sander حفاة دائرية

Input Power:	300 W
Pad Size:	125 mm
Rotation Speed:	6,000 – 12,000 min ⁻¹
Overall Dimensions:	226 × 123 × 151 mm
Weight:	1.5 Kg

 KYOCERA

07



APE-181G Sander Polisher 7" طاروخ تلميع وصنفرة

Input Power:	1200 W
Pad Size:	180 mm
Rotation Speed:	800 – 3,000 min ⁻¹
Action Type:	Single
Overall Dimensions:	469 × 80 × 130 mm
Weight:	2.5 Kg

 KYOCERA

08



D-110 Electric Drill 10 mm مثقاب كهربائي

Input Power:	500 W
Chuck Size:	10 mm
Drilling Capacity:	Wood: 25 mm Steel: 10 mm
Rotation Speed:	0 – 2,800 min ⁻¹
Overall Dimensions:	245 × 64 × 187 mm
Weight:	1.4 Kg

KYOCERA

09



PD-196VR Impact Drill 13mm مثقاب كهربائي

Input Power:	710 W
Chuck Size:	13 mm
Drilling Capacity:	Wood: 25 mm Steel: 13 mm Masonry: 19 mm
Rotation Speed:	0 – 2,600 min ⁻¹
Blows Per Minute:	0 – 46,800 min ⁻¹
Overall Dimensions:	299 × 66 × 198 mm
Weight:	1.75 Kg

KYOCERA

10



PD-1970VR Impact Drill 13mm مثقاب كهربائي

KYOCERA

11

Input Power:	710 W
Chuck Size:	13 mm
Drilling Capacity:	Wood: 40 mm Steel: 13 mm Masonry: 19 mm
Rotation Speed:	0 – 1,250 / 0 – 2,700 min ⁻¹
Blows Per Minute:	0 – 20,000 / 0 – 43,200 min ⁻¹
Overall Dimensions:	340 × 78 × 198 mm
Weight:	2.5 Kg



PD-220VR Impact Drill 13mm مثقاب كهربائي

KYOCERA

12

Input Power:	800 W
Chuck Size:	13 mm
Drilling Capacity:	Wood: 40 mm Steel: 13 mm Masonry: 22 mm
Rotation Speed:	0 – 1,350 / 0 – 2,700 min ⁻¹
Blows Per Minute:	0 – 21,600 / 0 – 43,200 min ⁻¹
Overall Dimensions:	350 × 86 × 214 mm
Weight:	2.7 Kg





 **KYOCERA**

ED-2630 Rotary Hammer 26 mm مثقاب مطرقي

Input Power:	830 W
Rotation Speed:	0 – 1,100 rpm
Hammering Frequency:	0 – 4,600 min ⁻¹
Drilling Capacity:	26 mm (Concrete)
Shank Type:	SDS Plus
Overall Dimensions:	367 × 78 × 214 mm
Weight:	2.7 Kg

 KYOCERA

13



CH-470 Concrete Hammer 17 mm مطرقة تكسير

Input Power:	1,050 W
Impact Energy:	8.8 J
Hammering Frequency:	3,000 min ⁻¹
Shank Type:	17 mm Hex
Overall Dimensions:	456 × 106 × 235 mm
Weight:	5.2 Kg

 KYOCERA

14



CH-485 Concrete Hammer 21 mm مطرقة تكسير

Input Power:	1,130 W
Impact Energy:	15 J
Hammering Frequency:	1800 min ⁻¹
Shank Type:	21 mm Hex
Overall Dimensions:	509 × 102 × 254 mm
Weight:	8.6 Kg

KYOCERA

15



BL-3500V Blower (Variable Speed) منفاخ هواء متعدد السرعات

Input Power:	630 W
Air Flow Output:	1.7 – 3.5 m ³ /min
Rotation Speed:	8,000 – 16,000 min ⁻¹
Overall Dimensions:	447 × 167 × 198 mm
Weight:	1.7 Kg

KYOCERA

16



BL-3500 Blower منفاخ هواء

Input Power:	630 W
Air Flow Output:	3.5 m ³ /min
Rotation Speed:	16,000 min ⁻¹
Overall Dimensions:	447 × 167 × 198 mm
Weight:	1.7 Kg

KYOCERA

17



HG-2000K Heat Gun 2000 W مسدس حراري

KYOCERA

18

Input Power:	2000 W
Temperature Setting:	450°C (Low) 600°C (High)
Airflow on Low Temperature:	300 l/min
Airflow on High Temperature:	500 l/min
Net Weight:	0.80 kg

Accessories in Plastic Carry Case	Scraper, Chisel, Glass Protection nozzle, Flat nozzle Hook nozzle, Concentration nozzle
-----------------------------------	--



C-126C Concrete Cutter 4½" منشار قص بلاط

KYOCERA

19

Input Power:	1400 W
Blade Diameter:	110 mm
Blade Bore:	20 mm
Max. Cutting Capacity:	34 mm
Rotation Speed:	12,000 min ⁻¹
Overall Dimensions:	210 × 210 × 180 mm
Weight:	2.9 Kg



C-3552 Cutting Saw 14"

منشار حديد

Input Power:	2300 W
Blade Diameter:	355 mm
Blade Bore:	25.4 mm
Max. Cutting Capacity:	Round Pipe – 120 mm
Rotation Speed:	3,600 min ⁻¹
Overall Dimensions:	586 × 290 × 658 mm
Weight:	17.0 Kg

 KYOCERA

20



HL-83 Planer

فارة

Input Power:	550 W
Planing Width:	82 mm
Planing Depth:	0-1 mm
Rabetting:	11.5 mm
Blade Rotation Speed:	16,000 min ⁻¹
Overall Dimensions:	309 × 164 × 164 mm
Weight:	2.3 Kg

 KYOCERA

21




RJK-110 Reciprocating Saw منشار ترددي

KYOCERA

22

Input Power:	210 W
Stroke Speed:	0 – 5,000 min ⁻¹
Stroke Length:	1.0 mm
Cutting Capacity:	Plastic Pipe: 120 mm Steel Pipe: 55 mm
Weight:	1.4 Kg

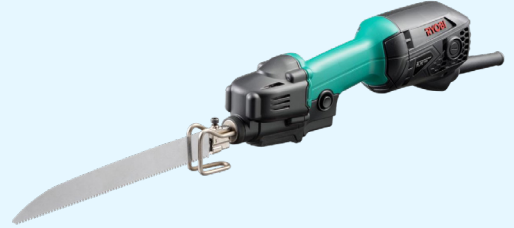

AW-1850 Circular Saw 7¼" منشار دائري

KYOCERA

23

Input Power:	1500 W
Blade Diameter:	185 mm
Blade Bore:	20 mm
Max. Cutting Capacity:	64 mm (90°) 48 mm (45°)
Rotation Speed:	6,000 min ⁻¹
Overall Dimensions:	285 × 221 × 251 mm
Weight:	3.3 Kg





 **KYOCERA**

W-2400 Circular Saw 9¼"

منشار دائري

Input Power:	2400 W
Blade Diameter:	235 mm
Blade Bore:	16 mm
Max. Cutting Capacity:	85 mm (90°)
Rotation Speed:	5,000 min ⁻¹
Overall Dimensions:	390 × 268 × 278 mm
Weight:	6.6 Kg

 KYOCERA

24



J-6500V Jig Saw

منشار أركت

Input Power:	400 W
Max. Cutting Depth:	Wood: 65 mm Aluminum: 15 mm Steel: 6 mm
Stroke Speed:	0 – 3,000 min ⁻¹
Overall Dimensions:	205 × 67 × 173 mm
Weight:	1.7 Kg

 KYOCERA

25



JS-600 Jig Saw منشار أركت

KYOCERA

26

Input Power:	600 W
No-Load Stroke Rate:	500 – 3,000 min ⁻¹
Max. Cutting Depth:	Wood: 120 mm Aluminum: 20 mm Steel: 10 mm
Stroke Length:	26 mm
Weight:	2.5 kg



CS-2240 Chain Saw 16" منشار حطب كهرباء

KYOCERA

27

Input Power:	2200 W
Chain Speed:	13.5 m/s
Cutting Length:	400 mm (16")
Oil Tank Capacity:	150 ml
Weight:	5.1 kg



AJP-1600 High Pressure Washer 130 Bar

28

ماكينة غسيل



Input Power:	1700 W
Water Pressure:	11 MPa (110 Bar)
Max. Pressure:	13 MPa (130 Bar)
Water Volume:	6.7 L/min
Overall Dimensions:	360 × 260 × 830 mm
Weight:	6.8 kg



AJP-1610 High Pressure Washer 140 Bar

29

ماكينة غسيل



Input Power:	1800 W
Water Pressure:	10 MPa (100 Bar)
Max. Pressure:	14 MPa (140 Bar)
Water Volume:	6.7 L/min
Overall Dimensions:	333 × 256 × 800 mm
Weight:	7.5 kg





DWT® 



تُعد علامة DWT من العلامات المعروفة في مجال العدد الكهربائية، حيث تقدّم أدوات تعتمد على جودة هندسية دقيقة وأداء عملي يناسب بيئات العمل المهنية. تتميز منتجاتها بالقوة في التشغيل، وثبات الأداء، والقدرة على تحمّل الاستخدام المتكرر في مواقع العمل، ما يجعلها مناسبة لقطاعات المقاولات والتشييد والأعمال الفنية المختلفة. وتشمل حلول DWT مجموعة من العدد الكهربائية وأدوات التشغيل التي تدعم تنفيذ الأعمال بكفاءة وموثوقية. وتوفّر شركة الصقور للمعدات الصناعية منتجات DWT ضمن معايير اختيار واضحة، تركز على الجودة والاعتمادية وملاءمة الاستخدام في السوق المحلي، بما يضمن أداءً مستقرًا يدعم متطلبات العمل اليومية

GS06-27LV Straight Grinder 1/4"

صاروخ حفر

Input Power:	600 W
Amperage at 230 V:	2.8 A
No-Load Speed:	12,000 – 27,000 rpm
Number of RPM Stages:	6-Stage
Spindle Inner Diameter:	10 mm
Collet Diameter:	6 mm
Weight:	1.68 kg

DWT®

30



WS08-115V Angle Grinder 4½"

صاروخ زاوية

Input Power:	860 W
Amperage at 230 V:	3.89 A
Rated Speed:	11,000 rpm
Max. Diameter of Cutting Disc:	115 mm
Max. Diameter of Grinding Disc:	115 mm
Max. Diameter of Rubber Sanding Plate:	115 mm
Max. Diameter of Circular Wire Brush:	75 mm
Max. Diameter of Cup Wire Brush:	75 mm
Weight:	2.05 kg

DWT®

31



WS10-115F Angle Grinder 4½"

صاروخ زاوية

Input Power:	1000 W
Amperage at 230 V:	4.5 A
Rated Speed:	11,000 rpm
Max. Diameter of Cutting Disc:	125 mm
Max. Diameter of Grinding Disc:	125 mm
Max. Diameter of Rubber Sanding Plate:	125 mm
Max. Diameter of Circular Wire Brush:	75 mm
Max. Diameter of Cup Wire Brush:	75 mm
Weight:	1.8 kg

DWT®

32



WS22-230CTNS Angle Grinder 9"

صاروخ زاوية

Input Power:	2200 W
Amperage at 230 V:	10 A
Rated Speed:	6,500 rpm
Max. Diameter of Cutting Disc:	230 mm
Max. Diameter of Grinding Disc:	230 mm
Max. Diameter of Rubber Sanding Plate:	230 mm
Max. Diameter of Circular Wire Brush:	100 mm
Max. Diameter of Cup Wire Brush:	100 mm
Weight:	5.9 kg

DWT®

33



ESS02-187T Orbital Sander حفافة

DWT®

34

Input Power:	200 W
Amperage at 230 V:	0.6 A
Rated Speed:	12,000 rpm
Orbit Diameter:	1.6 mm
No-Load Oscillations Rate:	24,000 rpm
Sanding Surface Size:	90 × 187 mm
Sanding Paper Size:	90 × 230 mm
Fastening System:	Clamping
Weight:	1.64 kg



OP13-180TV Car Polisher 7" طاروخ تلميع وصنفرة

DWT®

35

Input Power:	1300 W
Amperage at 230 V:	6.5 A
Rated Speed:	1,000 – 3,000 rpm
Max. Diameter of Rubber Sanding Pad:	180 mm
Weight:	3.1 kg



BM04-10 Electric Drill 10 mm مثقاب كهربائي

Input Power:	450 W
Amperage at 230 V:	2 A
No-Load Speed:	0 – 3,300 rpm
Chuck Tightening Range:	1.5 – 10 mm
Drilling Output in Steel:	10 mm
Drilling Output in Wood:	20 mm
Weight:	1.2 kg

DWT®

36



SBM07-13 Impact Drill 13 mm مثقاب كهربائي

Input Power:	710 W
Amperage at 230 V:	3.2 A
No-Load Speed:	0 – 2,800 rpm
Impact Rate:	0 – 44,800 rpm
Chuck Tightening Range:	1.5 – 13 mm
Drilling Output:	Concrete: 13 mm Steel: 13 mm Wood: 35 mm
Drill Chuck Thread:	1/2" × 20 UNF
Weight:	2.3 kg

DWT®

37



SBH08-26BMC Light Rotary Hammer 26 mm مثقاب مطرقي

DWT®

38

Input Power:	800 W
Amperage at 230 V:	3.6 A
No-Load Speed:	0 – 1,400 rpm
Chuck Type:	SDS-Plus
Impact Rate:	0 – 5,700 rpm
Single Impact Energy:	3 J
Drilling Output:	Concrete: 26 mm Steel: 13 mm Wood: 30 mm
Weight:	2.8 kg



BH15-36 Heavy Rotary Hammer 36 mm مثقاب مطرقي

DWT®

39

Input Power:	1500 W
Amperage at 230 V:	6.8 A
No-Load Speed:	0 – 880 rpm
Chuck Type:	SDS-Plus
Impact Rate:	0 – 4,350 rpm
Single Impact Energy:	6 J
Drilling Output:	Concrete: 36 mm Steel: 13 mm Wood: 40 mm
Weight:	5.4 kg



H13-05B BMC Hammer 21 mm مثقاب مطرقي

Input Power:	1300 W
Amperage at 230 V:	6 A
Chuck Type:	SDS-Max
Impact Rate:	4,200 rpm
Single Impact Energy:	18 J
Weight:	4.9 kg

DWT®

40



AH16-30B BMC Demolition Hammer 30 mm مطرقة تكسير

Input Power:	1700 W
Amperage at 230 V:	7.8 A
Tool Holder:	HEX-30
Impact Rate:	2,100 rpm
Single Impact Energy:	60 J
Weight:	15.6 kg

DWT®

41



LS06-280 Air Blower منفاخ هواء

Input Power:	650 W
Amperage at 230 V:	2.77 A
Impact Rate:	13,000 rpm
Air Flow Rate:	2.8 m³/min
Weight:	1.16 kg

DWT®

42



ESP05-200T Paint Sprayer مسدس بوية

DWT®

43

Input Power:	500 W
Amperage at 230 V:	2.2 A
Flow Rate:	0 – 200 ml/min
Max. Spraying Pressure:	0.1 – 0.2 bar
Max. Viscosity:	40 DIN-s
Nozzle Diameter:	1 mm
Reservoir Capacity:	1000 ml
Weight:	2.9 kg



MS13-110TW Marble Cutter 4½" قاطع الرخام

DWT®

44

Input Power:	1300 W
Amperage at 230 V:	6.3 A
Cutting Type:	Dry & Wet
Rated Speed:	13,000 rpm
Max. Diameter of Cutting Disc:	115 mm
Min. Diameter of Cutting Disc:	110 mm
Bore Diameter of Cutting Disc:	20 mm
Max. Thickness of Cutting Disc:	2.5 mm
Max. Cutting Depth at 90°:	30 mm
Max. Cutting Depth at 45°:	25 mm
Weight:	3.0 kg



SAS10-355DN Cut-off Saw 14"

منشار القطع

DWT®

45

Input Power:	2180 W
Amperage at 230 V:	10 A
No-Load Speed:	3800 rpm
Max. Diameter of Cutting Disc:	355 mm
Bore Diameter of Cutting Disc:	25.4 mm
Weight:	13.7 kg



SAS10-25V Reciprocating Saw

منشار ترددي

DWT®

46

Input Power:	1010 W
Amperage at 230 V:	4.5 A
Stroke Rate at No-Load:	300 – 2,400 per minute
Stroke Length:	28 mm
Cutting Ability:	Wood: 250 mm Steel: 120 mm
Weight:	3.7 kg



HKS12-59 Circular Saw 7¼"

منشار دائري

DWT®

47

Input Power:	1250 W
Amperage at 230 V:	5.6 A
No-Load Speed:	6,000 rpm
Blade Diameter:	185 – 190 mm
Blade Bore Diameter:	20 mm
Max. Blade Thickness:	2 mm
Max. Cutting Depth at 90°:	59 mm
Max. Cutting Depth at 45°:	38 mm
Weight:	3.7 kg



STS05-55DV Jig Saw

منشار أركت

DWT®

48

Input Power:	500 W
Amperage at 230 V:	2.2 A
Stroke Rate at No-Load:	700 – 3,000 per minute
Stroke Length:	18 mm
Cutting Ability:	Wood: 55 mm Aluminum: 10 mm Steel: 6 mm
Max. Angularity of Body (Right & Left):	45° / 45°
Weight:	2.0 kg



STS07-100DV Jig Saw منشار أركت

DWT®

49

Input Power:	701 W
Amperage at 230 V:	3 A
Stroke Rate at No-Load:	700 – 3,000 per minute
Stroke Length:	26 mm
Cutting Ability:	Wood: 100 mm Aluminum: 20 mm Steel: 10 mm
Max. Angularity of Body (Right & Left):	45° / 45°
Weight:	3.0 kg



OF-1050V Plunge Router ماكينة حفر

DWT®

50

Input Power:	1050 W
Amperage at 230 V:	4.5 A
No-Load Speed:	12,000 – 30,000 RPM
Collet Inner Diameter:	8 mm
Stroke of the Router Base:	50 mm
Weight:	3.2 kg





HALE®

HALE®

تُعد علامة HALE من العلامات التي تقدّم حلولاً عملية مصممة للاستخدام المكثف في بيئات العمل المهنية، حيث تركز على تحقيق توازن دقيق بين الأداء والاستقرار التشغيلي في مختلف ظروف التشغيل. تعتمد منتجاتها على تصميم يراعي استمرارية العمل، مع كفاءة في استهلاك الطاقة وثبات في الأداء خلال فترات التشغيل الطويلة، ما يجعلها مناسبة للتطبيقات التي تتطلب اعتماداً يومياً دون انقطاع. تتميز معدات HALE بقدرتها على تحمل ضغط العمل، مع أنظمة تشغيل تساعد على تقليل الاهتزاز وتحسين كفاءة التشغيل، إضافة إلى سهولة الصيانة وتوفير المكونات الداعمة، ما يساهم في تقليل الأعطال ورفع جاهزية المعدة. وتشمل حلولها مجموعة من المعدات المرتبطة بأنظمة الهواء والتشغيل المهني، المصممة لتلبية احتياجات قطاعات المقاولات والتشييد والاستخدامات الميدانية.

High Pressure Washer 150 Bar ماكينة غسيل

HALE®

51

MODEL	YLQ25SC-150 BAR
Voltage:	220 V
Frequency:	60 Hz
Motor:	2000 W
Motor Type:	Carbon Brush Motor
Hose Length:	6 Meter
Electric Cord Length:	5 Meter
Rated Pressure:	110 Bar
Max. Pressure:	150 Bar
Rated Flow:	6.7 Lit./Min
Net Weight:	13.5 Kg



High Pressure Washer 140 Bar ماكينة غسيل

HALE®

52

MODEL	YLQ5321C-140 BAR
Voltage:	220 V
Frequency:	60 Hz
Motor:	1800 W
Motor Type:	Carbon Brush Motor
Hose Length:	5 Meter
Electric Cord Length:	5 Meter
Rated Pressure:	100 Bar
Max. Pressure:	140 Bar
Rated Flow:	6.7 Lit./Min
Net Weight:	8.8 Kg



DH-65 Demolition Hammer (30 mm) مطرقة تكسير

HALE®

53

Rated Voltage:	220 V
Rated Frequency:	60 Hz
Rated Input Power:	2,200 W
Impact Rate:	1,500 min ⁻¹
Dimensions:	71.5 × 17 × 29 cm
Weight:	17 kg



Foam Tank خزان رغوة

HALE®

54

Model	100 Lit.	150 Lit.	200 Lit.	300 Lit.
Tank Size	100 Lit.	150 Lit.	200 Lit.	300 Lit.
Max. Pressure	8 Bar	8 Bar	8 Bar	8 Bar
Outlet Valve Size	1/2 Size	1/2 Size	1/2 Size	1/2 Size
Hose	5 Meter	5 Meter	5 Meter	5 Meter
Wheels	8"	8"	8"	8"
Gross Weight	41 Kg	48 Kg	64 Kg	93 Kg
Dimensions (LxBxH)	990×360×560 mm	1150×400×590 mm	1230×460×630 mm	1500×500×720 mm



Air Compressor ضاغط هوائية

Belt Driven Professional Series-Heavy Duty Work

Model	3008/50L
Pump	3008
Tank-Lit	50
Power - HP/Kw	2/1.5
Cylinder n.	2
Max. Pressure Bar/Psi	10/145
Lubricated	Yes
RPM	1445
Air Displacement 1/Min/CFM	261/9.2
Volt/Hz	220/60
Weight Kg	55
Dimensions WxDxH (mm)	766x400x670

HALE®

55



Belt Driven Professional Series-Heavy Duty Work

Model	3008/100L
Pump	3008
Tank-Lit	100
Power - HP/Kw	2/1.5
Cylinder n.	2
Max. Pressure Bar/Psi	10/145
Lubricated	Yes
RPM	1445
Air Displacement 1/Min/CFM	261/9.2
Volt/Hz	220/60
Weight Kg	72
Dimensions WxDxH (mm)	1150x430x800

HALE®

56



Oil-Less Silenced Compressor

Model	WB1500-1A50L
Pump	WB1500
Tank-Lit	50
Power - HP/Kw	2/1.5
Cylinder n.	2
Max. Pressure Bar/Psi	8/116
Lubricated	*
RPM	1400
Air Displacement 1/Min/CFM	235/8.3
Volt/Hz	220/60
Weight Kg	32
Dimensions WxDxH (mm)	670x382x675

HALE®

57



Hand Pallet Truck رافعة شوكية

HALE®

58

MODEL	2.5T	3.0T
Capacity (Kg)	2500	3000
Overall Fork Width (mm)	520	520
Fork Length (mm)	1070	1070
Fork Width (mm)	150	150
Minimum Fork Height (mm)	74	74
Maximum Fork Height (mm)	190	190
Load Wheel Size (mm)	74×55	74×70
Steer Wheel Size (mm)	180×50	180×50
Pump Type	Black	Black
Wheel Type	Double Nylon	Double Nylon





SENCI®



تُعد علامة **SENCI** من العلامات المتخصصة في مجال المولدات الكهربائية، حيث تجمع بين الكفاءة التشغيلية والتقنيات المصممة لتناسب بيئات العمل المختلفة، وتقدم حلول طاقة موثوقة تدعم استمرارية التشغيل في المواقع المهنية. تتميز منتجاتها بثبات الأداء وسهولة الاستخدام وقدرتها على العمل في ظروف تشغيل متنوعة، ما يجعلها خيارًا عمليًا لقطاعات المقاولات والتشييد والاستخدامات الميدانية. وتشمل حلول **SENCI** مجموعة من المولدات الكهربائية وملحقاتها، المصممة لتوفير طاقة مستقرة تلبي احتياجات التشغيل اليومية. وتوفر شركة الصقور للمعدات الصناعية منتجات **SENCI** ضمن معايير اختيار واضحة، تركز على الجودة والاعتمادية وملاءمة الاستخدام في السوق المحلي، بما يضمن أداءً مستقرًا وكفاءة تشغيلية مستمرة.

Gasoline Generator مولدات كهربائية



59

Model	SC1250	SC2500E	SC3500E	SC5000E	SC6000E	SC8000E	SC10000E
Frequency	50Hz / 60Hz						
Rated power	0.8kW / 1.0kW	2.0kW / 2.2kW	2.8kW / 3.2kW	4.0kW / 4.5kW	5.0kW / 5.5kW	6.5kW / 7.0kW	7.5kW / 8.5kW
Max. power	1.0kW / 1.2kW	2.2kW / 2.5kW	3.2kW / 3.5kW	4.5kW / 4.8kW	5.5kW / 6.0kW	7.5kW / 8.0kW	8.5kW / 9.0kW
AC Voltage	120V/240V						
Phase	Single						
Fuel capacity	6L	15L	15L	15L	25L	25L	25L
Run time@%50 load	8h	9.5h	9h	8.5h	9.5h	9.5h	9.5h
Engine model	API156F	API168F	API170F	SV275	API190F	SC420	SC460
Displacement	98cc	196cc	208cc	274cc	420cc	420cc	459cc
Max. output	3.5HP/3600rpm	6.5HP/3600rpm	7HP/3600rpm	9HP/3600rpm	14HP/3600rpm	14HP/3600rpm	16HP/3600rpm
Start system	Recoil/E-start						
Dimensions (mm)	510*390*440	620*490*490	620*490*490	625*490*510	720*550*580	715*545*585	720*550*580
Net weight	28kg	43kg	50kg	57kg	87kg	90kg	95kg
Loading Q'ty (20GP/40HQ)	335/680	168/430	168/430	168/336	128/264	128/264	128/264



Inverter Generator مولدات صامتة



60

Model	SC2300iD	SC4000i-O	SC8000i
Rated power	1800W	3500W	7000W
Maximum power	2000W	4000W	8000W
Rated current(A)	8.2A	15.9A	31.8A
DC current(A)	8A	8A	8A
Voltage	220V	220V	220V
Frequency(Hz)	60Hz	60Hz	60Hz
Power type	API49	SV230	SV460E
Power displacement(cc)	80	223	460
Speed(rpm)	5300	3600	3600
Oil capacity(L)	0.38	0.55	1
Fuel tank capacity(L)	4	10	26
Starting method	Recoil	Recoil/E-start	Recoil/E-start
Run time @%100 load(h)	4	5.5	5.5
Run time @%50 load(h)	7	9	10
Noise(dB)	63	58	65
Net weight(kg)	23	51	115
Length, width and height (mm)	517*315*500	660*560*650	820*640*780
Container quantity 20GP/40HQ	240/496	128/280	40/138



Inverter Generator مولدات صامت



Model	SC15000i(T)	SC24000i(T)
Frequency	50Hz / 60Hz	50Hz / 60Hz
Rated power	12.0kW	18.0kW
Max. power	13.0kW	20.0kW
AC voltage	120V/230V/400V	230V/400V
Phase	Single/Three	Single/Three
Fuel capacity	40L	45L / 70L
Run time (%100-%50 load)	10 - 5h	10 - 5h
Engine model	SV750 (744cc)	SV1000T (999cc)
Start system	E-start	E-start
Noise level (@4/1 load, 7m)	75dB(A)	72dB(A)
Parallel ready	Yes	Yes
Dimensions (mm)	972×783×873	996×783×873
Net weight	170kg	210kg
Loading Q'ty (20GP/40HQ)	28/56	28/56



Welding Generator مولدات لحام



Model	SC200A
Rated duty cycle	60%
OCV	DC 75V
Current range	50-200A
Welding voltage	22-28V
Welding rod	1.6-4.0mm
Rated current/Voltage(A/V)	180A/27.2V
Auxiliary rated power output	5kW
Rated frequency	50Hz/60Hz
Engine model	SC420
Max.power/speed	14HP/3600rpm
Displacement	420cc
Start method	Recoil/E-start
Fuel tank capacity(L)	18
Protection class	IP21S
Dimension(mm)	780*545*632
Net weight	98kg
Loading (20GP/40HQ)	84/168



Gasoline High Pressure Washer ماكينات غسيل بنزين



63

Model	SCGPW2700H-E	SCGPW3200H-E
Pressure	2700PSI / 186bar	3200PSI / 220bar
Flow	2.3GPM / 8.7L/min	2.5GPM / 9.5L/min
Engine	SC200 (208cc)	SC230 (223cc)
Start	Recoil Start	Recoil Start
Pump	Axial Cam Pump	Axial Cam Pump
Soap tank	On Board Tank	On Board Tank
Hose	7.6m	7.6m
Nozzle	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap
Wheel	12x2"	12x2"
Net weight	33kg	35kg
Dimension(mm)	590*540*605	590*540*605
Loading (20GP/40HQ)	129/344	129/344



Gasoline Water Pump طرمبات ماء بنزين



Model	SCWP-50	SCWP-80
Engine	SV210	SV210
Starting system	Recoil	Recoil
Displacement	209.2cc	209.2cc
Bore x stroke	74.5x48mm	74.5x48mm
Suction port diameter	50mm	80mm
Discharge port diameter	50mm	80mm
Total head lift	30m	30m
Discharge capacity	30m ³ /h	55m ³ /h
Suction head	7m	7m
Rated speed	3600rpm	3600rpm
Fuel tank capacity	3.6L	3.6L
Dimensions(mm)	490*410*405	520*410*470
Net weight	23kg	25kg
Loading Q'ty (20GP/40HQ)	320/810	295/750



Gasoline Engine & Related Product محركات بنزين & متعدد الاستخدامات



65

Model	SC-200	SC-230
Engine type	Single Cylinder, 4 Stroke, Forced Cooling OHV	
Bore x Stroke (mm)	68x54	70x58
Displacement	196cc	223cc
HP	6.5	7.5
Compression	8.5 : 1	8.5 : 1
Starting method	Recoil/E-start	Recoil/E-start
Ignition method	Transistorized ignition	Transistorized ignition
Lubrication method	Splash	Splash
Rated output(Kw-r/mim)	3.8-3600	4.6-3600
Max torque(N.m-r/min)	10.7-2500	12.5-2500
Min.fuel consumption(g/Kw.h)	≤395	≤374
Dimensiones L*W*H (mm)	380*325*335	380*325*335
Net weight	15kg	15.5kg
Loading Qty (20GP/40HQ)	510/1026	510/1026



معدات الخرسانة

Plate Compactor

Model	T-90A
Engine	Senci SC-200 (6.5HP)
Engine Type	Single Cyliner,4-Stroke,Forced Cooling OHV
Engine Displacement	196 cc
Size of Base Plate (LxW) (cm)	51x45
Max. Centrifugal Force (kN)	20
Vibration Frequency (vpm)	4500
Compaction Depth (Soil) (cm)	30
Forward Speed (Soil) (m/min)	Upto 30
Compacted Area (Soil) (m ² /min)	Upto 700
Operating Weight (Kgs)	95

SENCI

66



Vibrator Machine

Model	T-90A
Engine	Senci SC-200 (6.5HP)-Pertol
Engine Type	Single Cyliner,4-Stroke,Forced Cooling OHV
Engine Displacement	196 cc
Fuel Tank Capacity	3.6 Lit.
Horse Power	6.5 HP
Starting Method	Recoil Start
Coupling Size (mm)	38
Frame Rotation	360°
Max. Output (kw-r/min)	4.2/3600
Weight (Kgs)	21

SENCI

67



Power Trowel

Model	SM-1000
Engine	Senci SC-200 (6.5HP)
Engine Type	Single Cyliner,4-Stroke,Forced Cooling OHV
Engine Displacement	196 cc
Total Diameter (mm)	1000
Blade Diameter (mm)	350x150
Driving Speed (rpm)	50-130
Weight (Kgs)	76

SENCI

68





 **Asada**



تُعد علامة **ASADA** من العلامات اليابانية المتخصصة في أدوات التسنين والسباكة الفنية، حيث تتميز بجودة التصنيع والدقة العالية في التشغيل، ما ينعكس على جودة التنفيذ وسلامة العمل في التطبيقات المهنية. تعتمد منتجاتها على تصميم يضمن ثبات الأداء ودقة المعالجة، مع قدرة على تحمّل ظروف الاستخدام في بيئات العمل المختلفة، مما يجعلها مناسبة لقطاعات المقاولات والتشييد والأعمال الفنية المتخصصة. وتشمل حلولها مكائن سن المواسير وأدوات التشغيل المرتبطة بها، المصممة لتوفير نتائج دقيقة واعتمادية مستمرة. وتوفّر شركة الصقور للمعدات الصناعية منتجات **ASADA** ضمن معايير اختيار واضحة، تركز على الجودة والاعتمادية وملاءمة الاستخدام في السوق المحلي، بما يدعم كفاءة العمل ويعزّز استقرار الأداء.

Pipe Threading Machine ماكينة تسنين مواسير



69

Model	BEAVER 50 (1/2" ~ 2")		BEAVER 80 (1/2" ~ 3")		BEAVER 100 (1/2" ~ 4")
Threading Capacity	Pipe 1/2 ~ 2		Pipe 1/2 ~ 3		Pipe 1/2 ~ 4
	Bold 3/8 ~ 2 M10 ~42mm		Bold 3/8 ~ 2 M10 ~42mm		Bold 3/8 ~ 2 M10 ~42mm
	Conduit 19 ~51mm 1/2~2		Conduit 19 ~75mm 1/2~3		Conduit 19 ~75mm 1/2~3
Motor Power	Universal Single Phase		Universal Single Phase		Universal Single Phase
	Input 1150W Output 750W		Input 1700W Output 1140W		Input 1700W Output 1140W
	50/60Hz		50/60Hz		50/60Hz
	*Voltage made to Order		*Voltage made to Order		*Voltage made to Order
Spindle Speed	40 rpm(No Load)		33 rpm(No Load)		48 rpm(No Load)
Weight	44 Kg		74 Kg		105 Kg
Dimension	535(L) x 430(W) x 340(H)		680(L) x 480(W) x 420(H)		790(L) x 540(W) x 480(H)
Standard Accessories (BSPT or NPT)	Die-Head	Die-Head	Die-Head	Die-Head	Die-Head
	1/2~2(Manual)	BE1/2~2(Auto)	1/2~2(Manual)	BE1/2~2(Auto)	1/2~2(Auto)
			2~3(Manual)	AT2.1/2~3(Auto)	AT2.1/2~4(Auto)
	Dies	Dies	Dies	Dies	Dies
	BE1/2~3/4	BE1/2~3/4	BE1/2~3/4	BE1/2~3/4	BE1/2~3/4
	BE1~1.1~2(2)	BE1~1.1~2(2)	BE1~1.1~2(2)	BE1~1.1~2(2)	BE1~1.1~2(2)
			2~3	AT2.1/2~3	AT2.1/2~4



Bolt Machine 25-PRO (8-24mm) ماكينة تسنين مواسير



Specification	Weight	Spindle Speed	Motor	Stroke	Standard Accessories
Metric	45 Kg	80 min ⁻¹	1140 W	180 mm	Die-Head Right 8–24mm
					Dies: Right 12mm & 14–16mm
					4L Threading Oil Red (4L), Set Lever
BSW					Single Head Wrench
					Hexagonal Wrench, Legs
					Die-Head Right BSW 5/16–1"
					Dies: Right BSW 1/2 & 5/8"
					4L Threading Oil Red (4L), Set Lever
					Single Head Wrench
					Hexagonal Wrench, Legs
UNC					Die-Head Right UNC/UNF 5/16–1"
					Dies: Right UNC 1/2 & 5/8"
					4L Threading Oil Red (4L), Set Lever
					Single Head Wrench
					Hexagonal Wrench, Legs



Roll Groover راس كبس جروف



71

Model:	RG-640
Capacity:	Steel Pipe: 1°-6° (Sch.10-40)
Weight:	12 Kg
Size:	355 mm
Bore Diameter of Cutting Disc:	280 × 260 × 250 mm
Standard Accessories:	Roller Shaft Set 2'-6° Connecting Shaft Base Bracket, Depth Gauge Hex Wrench-3,4,5,6 mm



Threading Oil زيت تسنين



72

- Effective cooling and lubrication ensures longer life of the dies
- Ideal for bolt and conduit pipes
- Sharp cutting without distortions (old oil causes bad thread)
- Applicable to stainless steel pipes and gas pipes



Electronic Test Pump ماكينة فحص مواسير



73

Model:	EP-440
Maximum Pressure:	3.92 Mpa / 40 Kg/fcm ²
Discharge Water Volume:	3.7 Lit/min (60Hz)
Motor:	220V / 200W
Weight:	9 Kg
Standard Accessories:	Pressure Gauge unit
	High Pressure Hose-1m
	Suction Hose 2.6m, Filter
	Relief Hose 2.6m
	2 Wrenches, Case




Hand Test Pump ماكينة فحص مواسير يدوي



74

Model:	TP-50E
Maximum Pressure:	50 Kg/cm ² (711.2 psi)
Discharge	16 ml/one stroke
Exhalation:	BSPT 1/4"
Weight:	3.3 Kg
Tank Capacity:	3.0 Lit.
Dimension (LxWxH):	330x233x240 mm
Standard Accessories:	Hose-1m



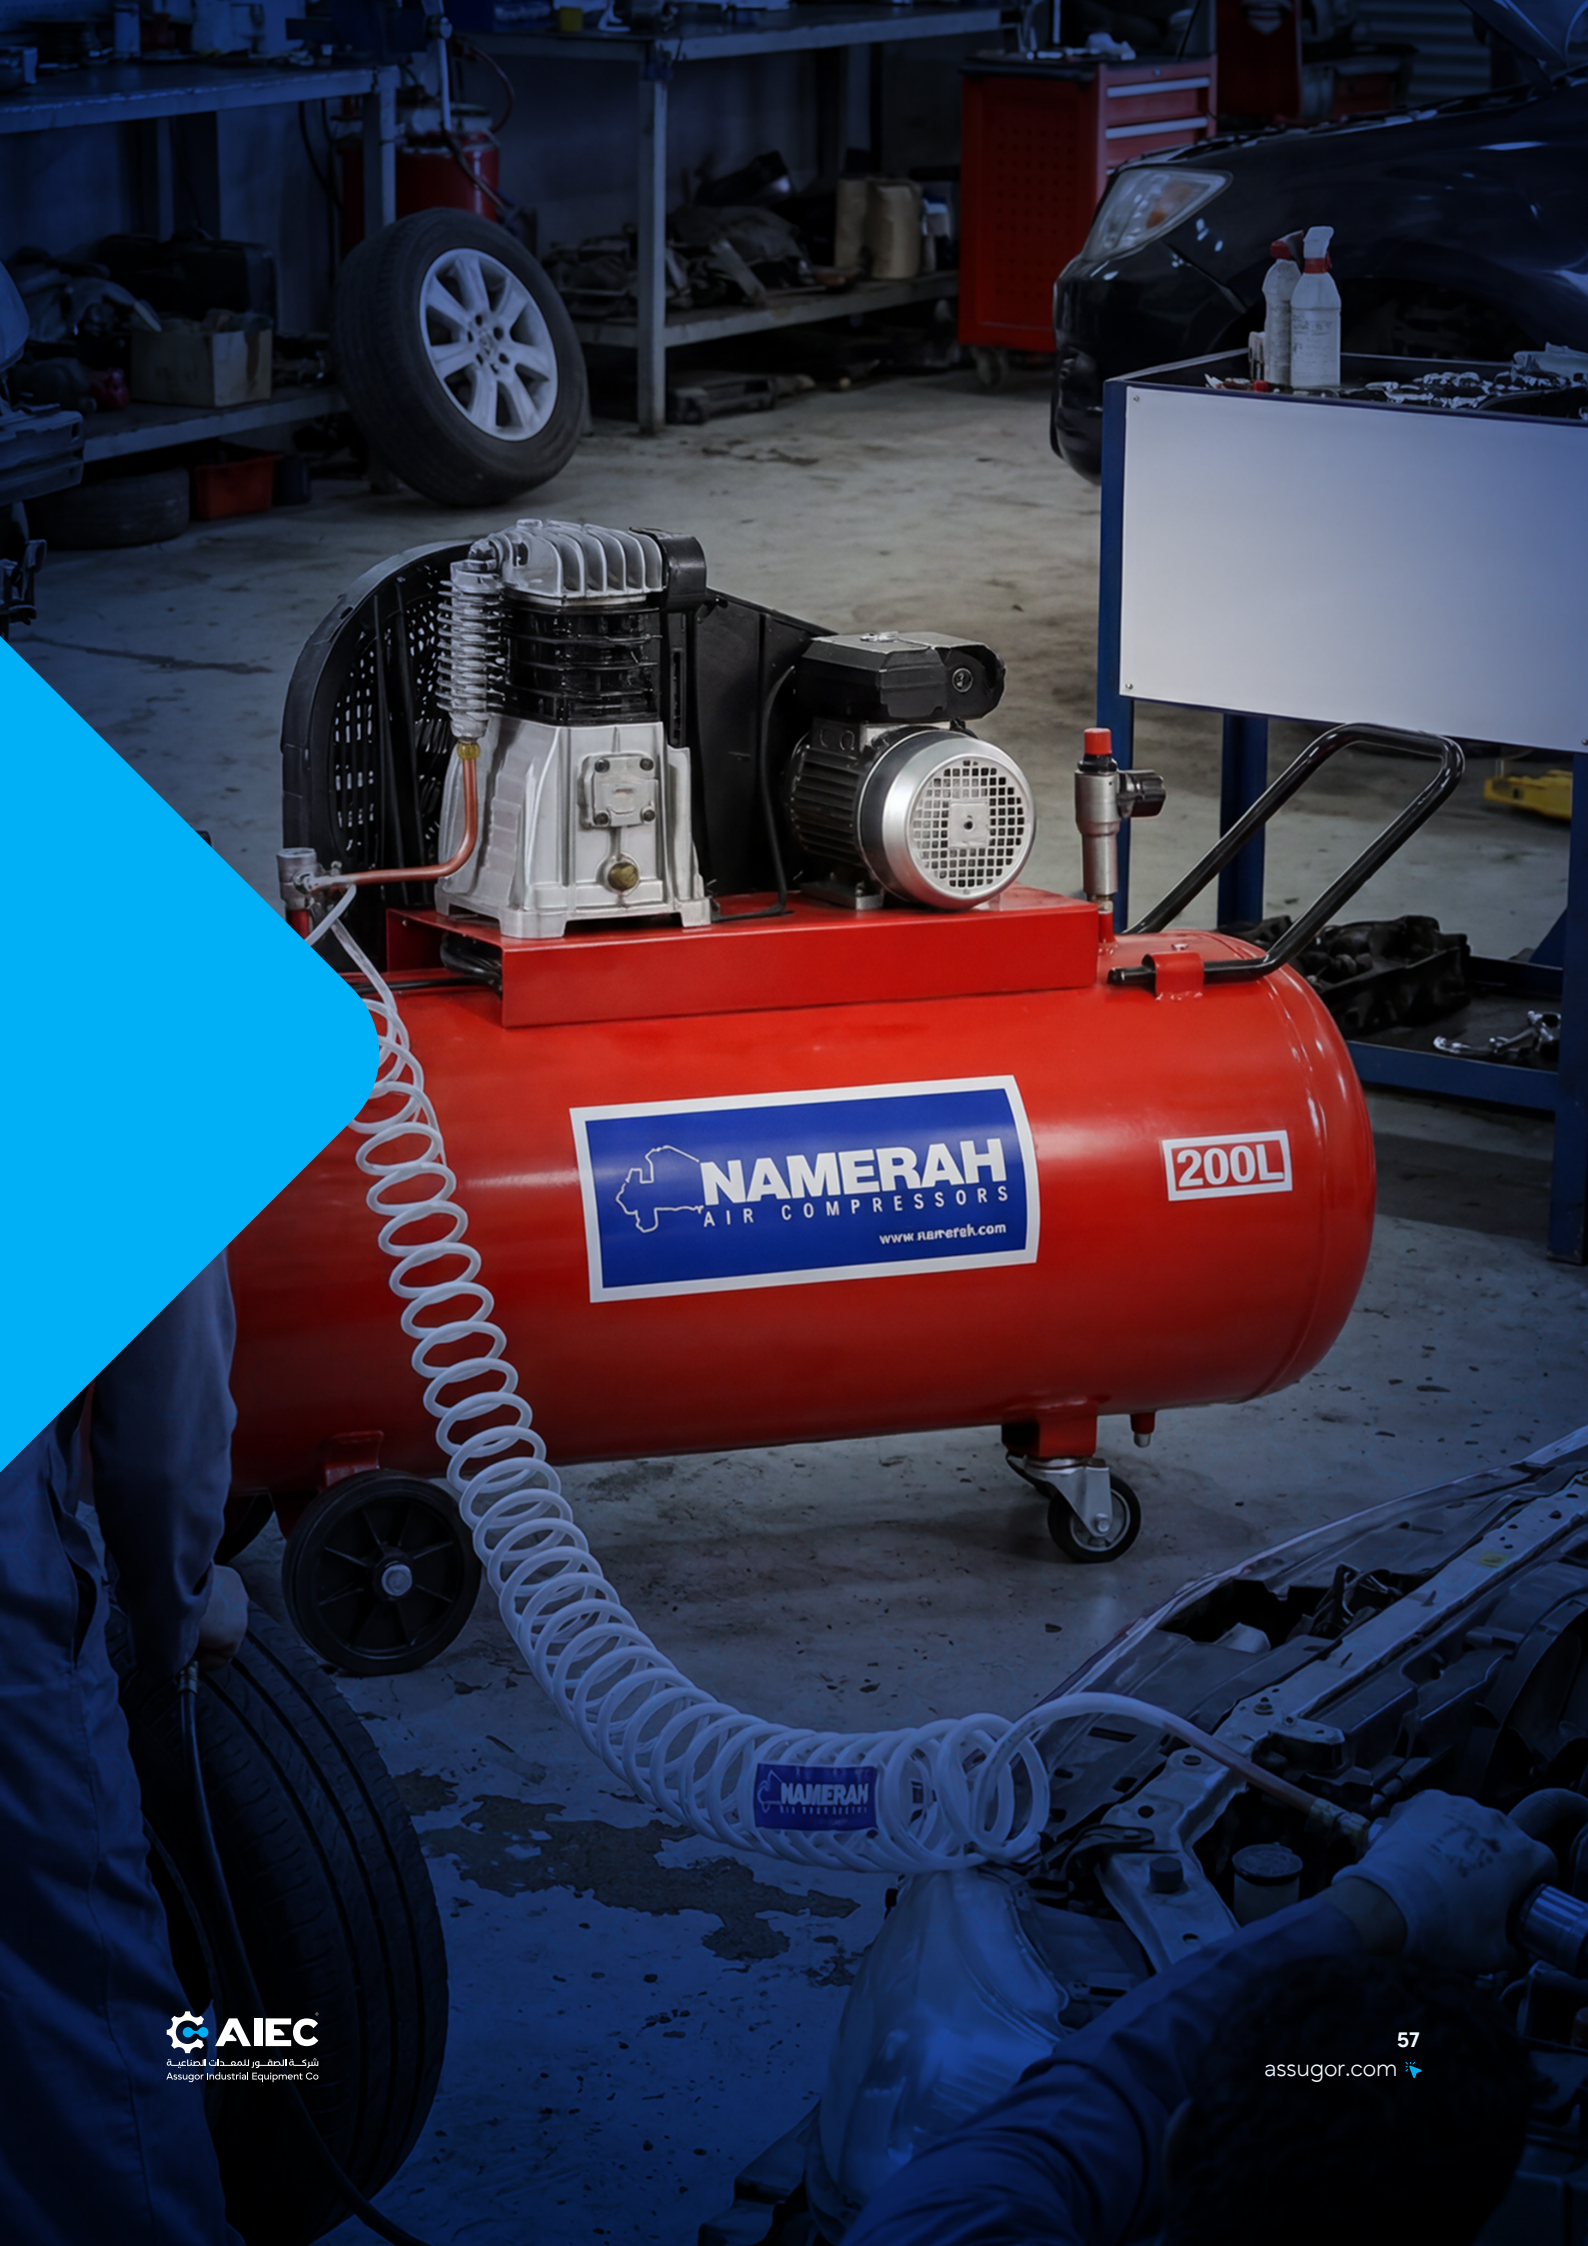



إلى جانب العلامات السابقة، تضم شركة الصقور للمعدات الصناعية مجموعة إضافية من العلامات المتخصصة، تتنوع بين حلول الضواغط، ومعدات التشغيل الصناعية، والعدد الكهربائية، ومكوّنات داعمة للأداء، وجميعها تم اختيارها بعناية لتوسيع نطاق الحلول، وتلبية احتياجات قطاعات المقاولات والتشييد في مختلف بيئات العمل.

Air Compressor ضاغط هواء



75

Model	Volt.	Size	Motor	Displ.	Pump	RPM	Max. Pres.	Dimension
N 50 / 360 / 2HP	220 V	50 Lit.	2HP	247-8.7	360	1200	9-131	900×300×690
N 100 / VG30 / 2HP	220 V	100 Lit.	2HP	247-8.7	VG30	1200	9-131	1150×350×770
N 150 / VG30 / 3HP	220 V	150 Lit.	3HP	247-8.7	VG30	1200	9-131	1330×400×830
N 200 / VG30 / 3HP	220 V	200 Lit.	3HP	315-11.1	VG30	1200	9-131	1470×430×920
N 300 / VG4 / 3HP	220 V	300 Lit.	3HP	315-11.1	VG4	1200	9-131	1680×500×1060
N 500 / VG6 / 5.5HP	220/380 V	500 Lit.	5.5HP	586-20.6	VG6	1200	12-175	1980×680×1260
N 500 / VG6 / 7.5HP	220/380 V	500 Lit.	7.5HP	586-20.6	VG6	1200	12-175	1980×680×1260





Air Compressor Motor (Italy)

محركات كهربائية - إيطالي



76

Model	For Air Comp.	Type	kW	V	Hz	rpm	A	IP	Amb	Weight
2HP	25-50-100-200 Lit.	Single Phase	1.50	220	60	3300	10.50	54	40°	10.7 Kg
3HP	200-300 Lit.	Single Phase	2.20	220	60	3300	11.50	54	40°	12.1 Kg
4HP Single Phase	300 Lit.	Single Phase	3.00	220	60	3410	6.70-11.60	54	40°	17.4 Kg
4HP Three Phase	300 Lit.	Three Phase	3.00	220/380	60	3410	6.70-11.60	54	40°	17.4 Kg
5.5HP	500 Lit.	Three Phase	4.00	220/380	60	3440	8.93-15.40	54	40°	20.8 Kg
7.5HP	500 Lit.	Three Phase	5.50	220/380	60	3440	11.80-20.50	54	40°	28.8 Kg
10HP	1000 Lit.	Three Phase	7.50	220/380	60	3460	15.60-27.00	54	40°	42.8 Kg

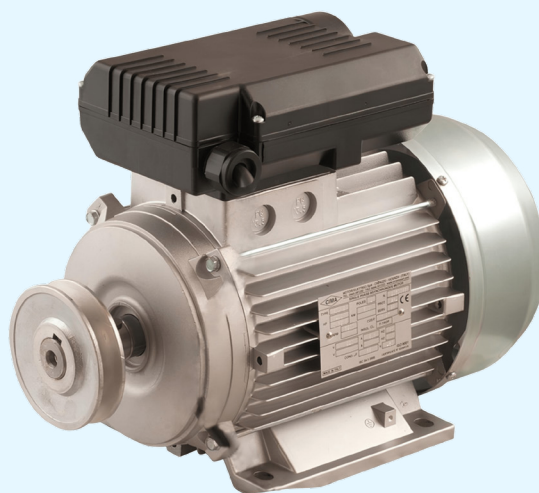
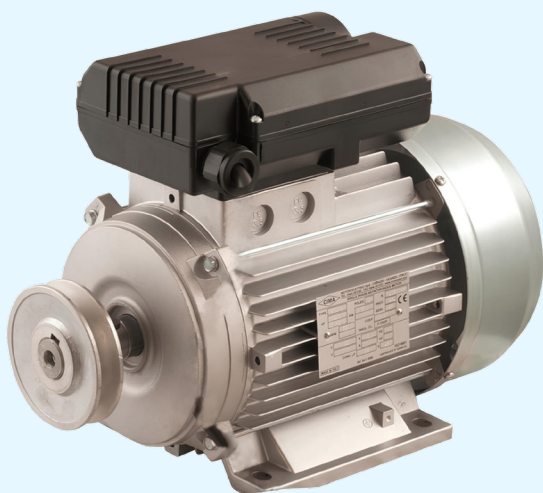


Air Compressor Pump (Italy)

طرمبات هواء - إيطالي



Model	Cylinder	Stage	Air Displace		Motor		rpm	V/Hz	Max. Pressure	
			1/min	CM	HP	KW			Bar	psi
N2.8	2	1	247	8.7	2	1.5	1300	220/60	9	131
N3	2	1	315	11.1	3	2.2	1400	220/60	9	131
N4	2	1	481	16.9	4	3	1250	220/60	9	131
N5	2	1	585	21.6	7.5	5.5	1350	220/60	12	175
N6	2	2	620	28.2	7.5	5.5	1400	220/60	12	175
N10	4V	2	1084	38.3	10	7.5	1150	220/60	12	175

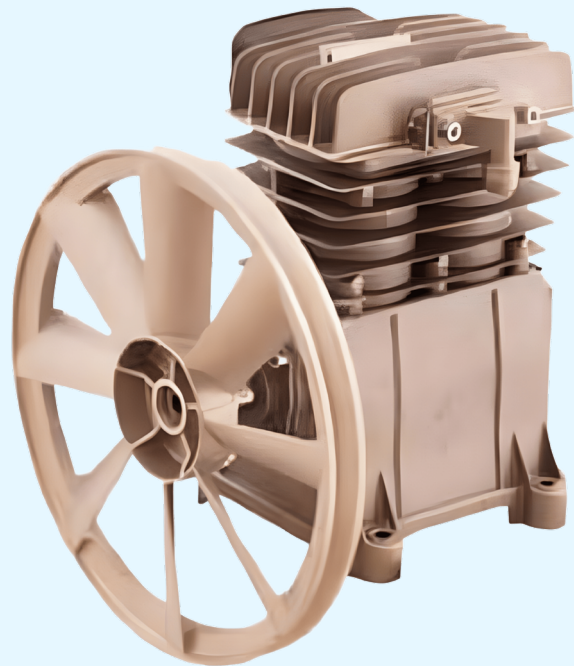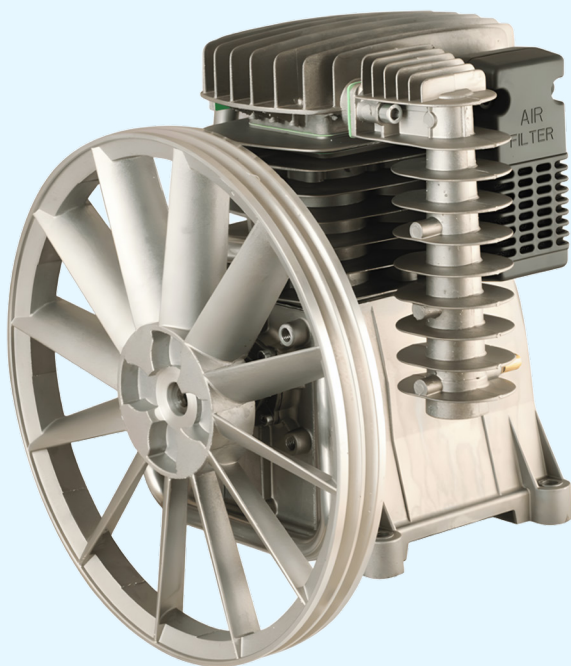

Air Hose – Italy

لي هواء ايطالي

78

camital

Size

8 mm x 20 Meter – Red & Black

8 mm x 40 Meter – Red & Black

10 x 17 mm x 40 Meter – Black

13 x 19 mm x 40 Meter – Black

19 x 28 mm x 40 Meter – Black

25 x 36 mm x 40 Meter – Black



Air Hose (Malaysia)

لي هواء ماليزي

79

WELL

Size

8 mm x 20 Meter – Red & Black

8 mm x 40 Meter – Red & Black

9.5 x 17 mm x 40 Meter – Black

13 x 20 mm x 40 Meter – Black

19 x 29 mm x 40 Meter – Black

25 x 36 mm x 40 Meter – Black



Vibrator Hose

لي هزاز خرسانة

80

HALE

Size

China - 38mm, 45mm

Korea - 38mm, 45mm

(With And Without Clips)



Oxygen Hose (Malaysia)

لي اكسجين-ماليزي

81

WELL

Size

7.5 Meter

15 Meter

30 Meter





KYOCERA


O7104R 908

 KYOCERA

Accessories

Bull Point Chisel عتلات تكسير مسمار

Shank Shape & Size (mm)	Length (mm)	Type
Hex 17	280	With Ring
Hex 17	280	Without Ring
Hex 17	450	Without Ring
Hex 17	450	With Ring
Hex 21	320	Without Ring
Hex 21	450	Without Ring
Hex 30	410	Without Ring
Hex 17	280	Without Ring (China)
Hex 17	450	Without Ring (China)
Hex 21	320	Without Ring (China)
Hex 30	410	Without Ring (China)



Cold (Flat) Chisel عتلات تكسير مسطحة

Shank Shape & Size (mm)	Length (mm)	Type
Hex 17	280	With Ring
Hex 17	280	Without Ring
Hex 17	450	Without Ring
Hex 17	450	With Ring
Hex 21	320	Without Ring
Hex 21	450	Without Ring
Hex 30	410	Without Ring
Hex 17	280	Without Ring (China)
Hex 17	450	Without Ring (China)
Hex 21	320	Without Ring (China)
Hex 30	410	Without Ring (China)



Scaling Chisel عتلات تكسير عريضة

84

Shank Shape & Size (mm)	Length (mm)	Type
Round 17	280	With Ring
Square 17	280	With Ring
Hex 17	280	Without Ring (China)
Hex 21	320	Without Ring



Metal Bit & Cobalt Bit (Stainless Steel) ريش حديد & ريش رخام


85

Size For Metal (mm)

0.5	1	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5
7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5
13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5
19	19.5	20	22	25							

Size For Stainless Steel (mm)

2.5	3	3.5	4	4.5	5	5.5	6	7	8	9	10
-----	---	-----	---	-----	---	-----	---	---	---	---	----

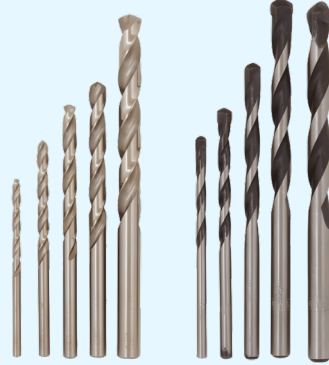

Concrete Bits ريش جدار


86

Size For 280mm Long Bit

10	12	14	16	19	20	22	25	28
----	----	----	----	----	----	----	----	----

Size For 505 mm Long Bit

16	18	19	20	22	25	32	38
----	----	----	----	----	----	----	----

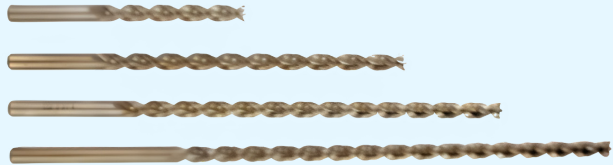

Masonry Bits

ریش جدار

Size For 115mm Long Bit

3 | 3.5 | 4 | 4.5 | 5 | 6 | 6.5 | 7 | 7.5 | 8 | 9 | 10

Size For 150mm Long Bit

6 | 14 | 18 | 20 | 24

Size For 200mm Long Bit

5 | 6 | 7 | 8 | 10 | 12

Size For 400mm Long Bit


10 | 12 | 14 | 16 | 18

Size For Saphir Bit For Marble (Standard Bit (mm))

4 | 5 | 6 | 7 | 8 | 10 | 12 | 14

Size For Rubin Bit For Granite (Standard Bit (mm))

4 | 6 | 7 | 8 | 10 | 12

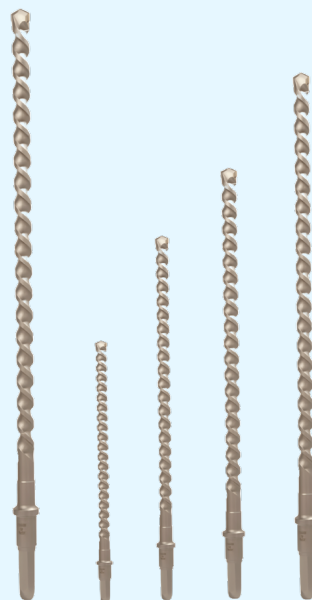

Jig Saw Blade

ریش آرکت

Model	Kyocera Model#	Cutting
No. 2	JS 60A, J500	Board
No. 12	JS 60A, J500	Steel
No. 3	JS 60A, J500	Wood
No. 13	JS 60A, J500	Board
No. 4	JS 60A, J500	Steel
No. 15	JS 60A, J500	Wood
No. 33	JS 6500	Steel
No. 39	JS 6500	Wood



Hole Saw And Mandril

ریش تخریم جدار

Size (mm)

14	16	17	19	20	21	22	24	25	27	29	30
32	33	35	37	38	40	41	43	44	46	48	51
52	54	57	59	60	64	65	68	70	73	76	79
83	89	92	95	98	102	105	108	111	114	121	127
140	141	152	177	200	210						

Mandril

5514	5519	5546
------	------	------



Wood Cutting Blade

قرص خشب

Size	Teeth	Thickness	Ring Size
7.25"	40	2.2 mm	25.4 mm
7.25"	60	2.2 mm	25.4 mm
9.25"	60	2.8 mm	25.4 mm
10"	60	2.8 mm	25.4 mm
10"	60	2.8 mm	25.4 mm




Aluminium Cutting Blade قرص ألومنيوم

Size	Teeth	Thickness	Ring Size
7.25"	40	2.2 mm	25.4 mm
7.25"	60	2.2 mm	25.4 mm
10"	80	3.0 mm	25.4 mm
10"	100	3.0 mm	25.4 mm
14"	80	3.2 mm	25.4 mm
15"	100	3.2 mm	25.4 mm



Tiles And Road Cutting Blade قرص بلاط

Size	Thickness	Ring Size	Type
4"	1.5 mm	20.0 mm	Wet
4"	1.5 mm	20.0 mm	Dry
7"	1.8 mm	25.0 mm	Wet
7"	2.0 mm	25.0 mm	Dry
14	3.2 mm	27.0 mm	Road Cutter
16"	3.2 mm	16.0 mm	Road Cutter

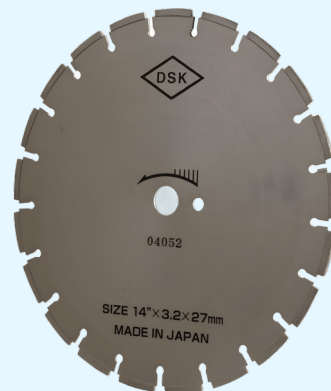

Spare Parts



Armature-Kyocera



Bit Grease-Kyocera




Saw Chain




Switch-Asada




Die Head-Asada



Cutter Blade-Asada



Threading Dies-Asada



Gasket Kit-Air Pump



Connecting Rod-Air Pump




Coupler-Air Pump



Filter-Air Pump



Nylon Hose



Motor Fan



Switch-Air Compressor



Motor Pully



Air Pump Pully




Piston-Air Pump



Safety Valves



Regulator




Capacitor



Pressure Gauge



Crank Shaft Gear-Senci



Carburator-Senci



Self Motor-Senci

Contact US

تواصل معنا!



 info@assugor.com

 sales@assugor.com

 assugor.com

الرياض - شارع عمر المختار (الريل)
Riyadh - Omer Al-Mukhtar (Al-Rail) St

  0114050825

الدمام - الشارع التاسع (الجوازات)
Dammam - 9th Street (Immigration Road)

 0138306161

جدة - حي السروات
Jeddah - AL Sarawat Dist

  0114050825

